




Concrete Pipe Division

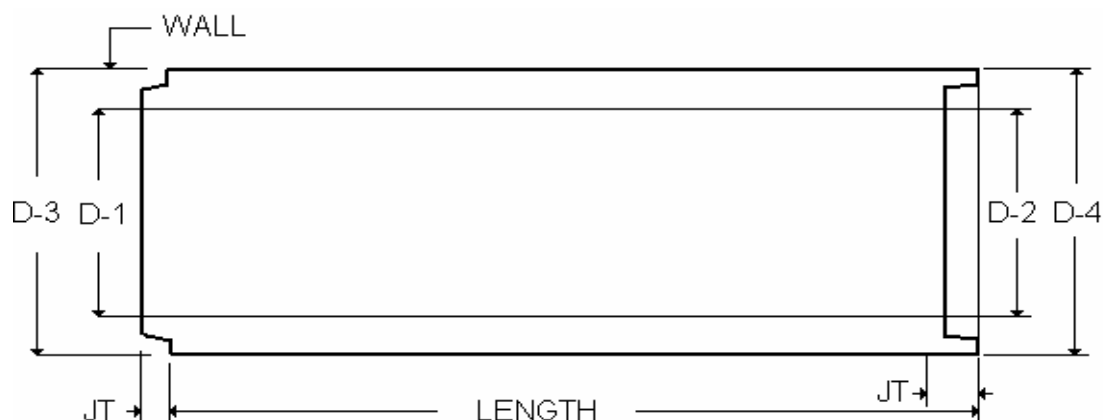

Dimensions are listed in Inches

SIZE	WALL	LENGTH	JT	D-1	D-2	D-3	D-4
48	5	8'-0"	4 1/4	48	48	58	58 1/8
54	5 1/2	8'-0"	4 1/4	54	54	65	65 1/8
60	6	8'-0"	4 3/4	59 31/32	60 1/32	72	72 1/8
66	6 1/2	8'-0"	5	65 31/32	66 1/32	79	79 1/8
72	7	8'-0"	5	71 31/32	72 1/32	86	86 1/8

Size	CLASS III MIN STEEL		CLASS IV MIN STEEL		CLASS V MIN STEEL	
	INSIDE CAGE	OUTSIDE CAGE	INSIDE CAGE	OUTSIDE CAGE	INSIDE CAGE	OUTSIDE CAGE
48"	0.24	0.13	0.42	0.25	0.73	0.44
54"	0.29	0.17	0.50	0.30	SPECIAL DESIGN	
			Concrete Strength (48" - 54") 4000 psi		SPECIAL DESIGN	
60"	0.34	0.20	0.59	0.35	SPECIAL DESIGN	
66"	0.41	0.25	0.69	0.41	SPECIAL DESIGN	
72"	0.49	0.29	0.79	0.47	SPECIAL DESIGN	
Concrete Strength (48" - 72") 4000 psi			Concrete Strength (60"- 72") 5000 psi		Concrete Strength (48"- 72") 6000 psi	

Pipe is Produced in Accordance to ASTM C-76

Gasket Joint in Accordance to ASTM C-443

3" Diameter Lift Hole in Pipe 36" Diameter and Greater

4360 White Lick Drive
Whitestown, IN 46075
317-769-5801 - Phone
317-769-5810 - Fax

PRODUCT DESCRIPTION:
Single Offset Spigot for Gasket or Mastic Joint
48"-72" DIAMETER

Date: 9/12/08