


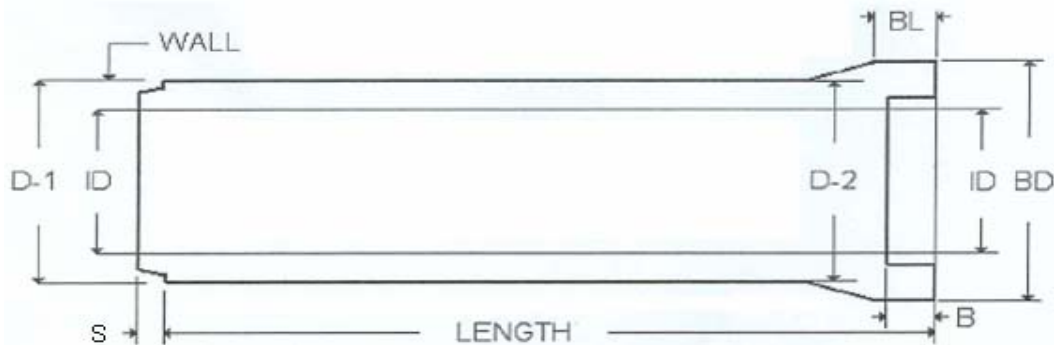

Dimensions are listed in Inches

SIZE	ID	WALL	LENGTH	BL	B	S	D-1	D-2	BD
12	12	2 5/32	8'-0"	6 1/2	3 1/2	3 1/2	16 5/16	16 11/16	19 5/8
15	15	2 13/32	8'-0"	6 1/2	3 1/2	3 1/2	19 13/16	20 3/16	23 1/8
18	18	2 1/2	8'-0"	6 1/2	3 1/2	3 1/2	23	23 3/8	26 5/8
21	21	2 3/4	8'-0"	7	3 1/2	3 1/2	26 1/2	26 3/4	29 5/8
24	24	3	8'-0"	7	3 1/2	3 1/2	30	30 1/4	32 5/8
27	27	3 1/4	8'-0"	7	3 1/2	3 1/2	33 1/2	33 3/4	35 5/8
30	30	3 1/2	8'-0"	7	3 1/2	3 1/2	37	37 1/8	39 1/2
36	36	4	8'-0"	7	3 1/2	3 1/2	44	44 1/8	45 5/8
42	42	4 1/2	8'-0"	7	4	4	51	51 1/8	52

Size	CLASS III MIN STEEL		CLASS IV MIN STEEL		CLASS V MIN STEEL	
	INSIDE CAGE	OUTSIDE CAGE	INSIDE CAGE	OUTSIDE CAGE	INSIDE CAGE	OUTSIDE CAGE
12"	N/A	N/A	0.07	N/A	0.1	N/A
15"	0.07	N/A	0.10	N/A	0.14	N/A
18"	0.07	N/A	0.14	N/A	0.19	N/A
21"	0.07	N/A	0.20	N/A	0.24	N/A
24"	0.07	N/A	0.27	N/A	0.30	N/A
27"	0.16	N/A	0.31	N/A	0.38	0.23
30"	0.18	N/A	0.35	N/A	0.41	0.25
36"	0.17	0.10	0.30	0.18	0.50	0.30
42"	0.21	0.13	0.35	0.21	0.60	0.36
Concrete Strength (12" - 42") 4000 psi			Concrete Strength (12" - 42") 4000 psi		Concrete Strength (12" - 42") 6000 psi	

Pipe is Produced in Accordance to ASTM C-76

Gasket Joint in Accordance to ASTM C-443

3" Diameter Lift Hole in Pipe 36" Diameter and Greater

4360 White Lick Drive
Whitestown, IN 46075
317-769-5801 - Phone
317-769-5810 - Fax

PRODUCT DESCRIPTION:
Single Offset Spigot for Gasket or Mastic Joint
12"-42" DIAMETER

Date : 05/27/14